



## MATERIALS

**Coats & Clark Dual Duty XP® All-purpose Thread**  
**Coats & Clark Cotton Machine Quilting thread OR**  
**Dual Duty Plus Hand Quilting Thread**

Scraps for patchwork  
½ yard (.46m) tone on tone black print A  
½ yard (.46m) tone on tone black print B  
¾ yard (.69m) red batik  
Cotton batting  
Safety pins



SEWING | SKILL LEVEL: INTERMEDIATE

## Featuring Coats & Clark Dual Duty XP®

Create this fun patchwork bag using up all your scraps (OK, some of your scraps). The patchwork is quick and easy whether you choose to quilt by hand or machine- there is a Dual Duty thread right for you.

### MEASUREMENTS

13½" H x 12 ½" W (34.29cm x 31.75cm)

*Seam allowances are ¼" (3.56cm)*

### CUTTING

#### From scraps:

21 squares 2" x 2" (5.08cm x 5.08cm)

8 rectangles 2" x 5" (5.08cm x 12.70cm)

#### Tone on tone black print A:

Two strips 23" x 3" (58.42cm x 7.62cm)

One rectangle 14" x 28" (35.56cm x 71.12cm) for lining

#### Red batik:

Two strips 23" x 2" (58.42cm x 5.08cm)

130 inches (330.2cm) of 2½" (6.35cm) wide binding strips cut on the bias

#### Tone on tone black print B:

Two strips 13" x 3" (33.02cm x 7.62cm)

Two from side panel pattern provided


#### Fusible fleece:

Four bag top fusible interfacing pieces using pattern provided

Two from side panel pattern provided.

## SEWING

1. Thread machine with Dual Duty all-purpose thread.
2. Place two of the 2" x 2" (5.08cm x 5.08cm) squares right sides together. Stitch using a ¼" (.635cm) seam allowance.
3. Repeat for a total of seven segments.
4. Add a third square onto each of the segments.
5. Press the seams open.



6. Stitch the 2" x 5" (5.08cm x 12.70cm) strips in between the pieced segments.



7. Press the seams open.



8. Place the 23" x 3" (58.42cm x 7.62cm) tone on tone black print A strips right sides together with the patchwork strip and stitch one on each side.
9. Place the 23" x 2" (58.42cm x 5.08cm) red batik strips on each side and stitch in place.
10. Stitch the 13" x 3" (33.02cm x 7.62cm) tone on tone black print B strips onto the two ends of the pieced strip.
11. Press all seams open.
12. Fold the patchwork piece in half, lengthwise. Align the purse top pattern piece on one end as shown. Cut out the top curve and the center opening. See Purse top pattern on page 4.



13. Repeat for the other end of the patchwork. The purse front/back/bottom is now ready to quilt!
14. Layer the patchwork purse with batting between the 14" x 28" (35.56cm x 71.12cm) lining and the patchwork.
15. Cut out the bag top, using the pattern given.
16. Place the bag top fusible interfacing pieces on the wrong side of the handle top and fuse two on each handle in place. Fuse them one at a time, using a press cloth.
17. Baste the outer edge of the bag and quilt as desired. Hand quilt using Dual Duty Plus Hand Quilting thread or machine quilt with Coats & Clark Cotton Machine Quilting thread. It's your choice. See Side panel pattern on page 5.
18. Fuse the fusible fleece to the wrong side of the side panel pieces.
19. Fold the panels in half, wrong sides together and baste around the outside edge.







20. Pin the side panel piece in place, matching the center of the side panel piece to the center of the bag panel.
21. Stitch the side panels in place using a ¼" (.635cm) seam allowance.



22. Piece binding as necessary forming one long binding strip.
23. Fold in half, wrong sides together and press.
24. Stitch the binding to the right side of the handle openings, and to the exposed seam around the outside edge of the bag.
25. Bring the binding to the other side and hand stitch in place.




Align here with patchwork top edge

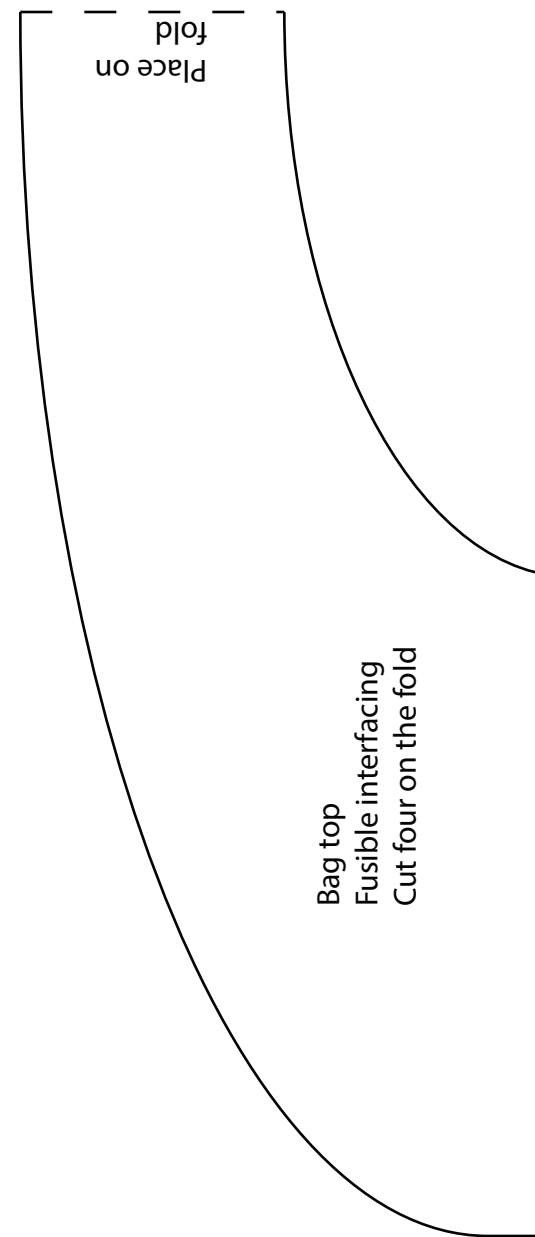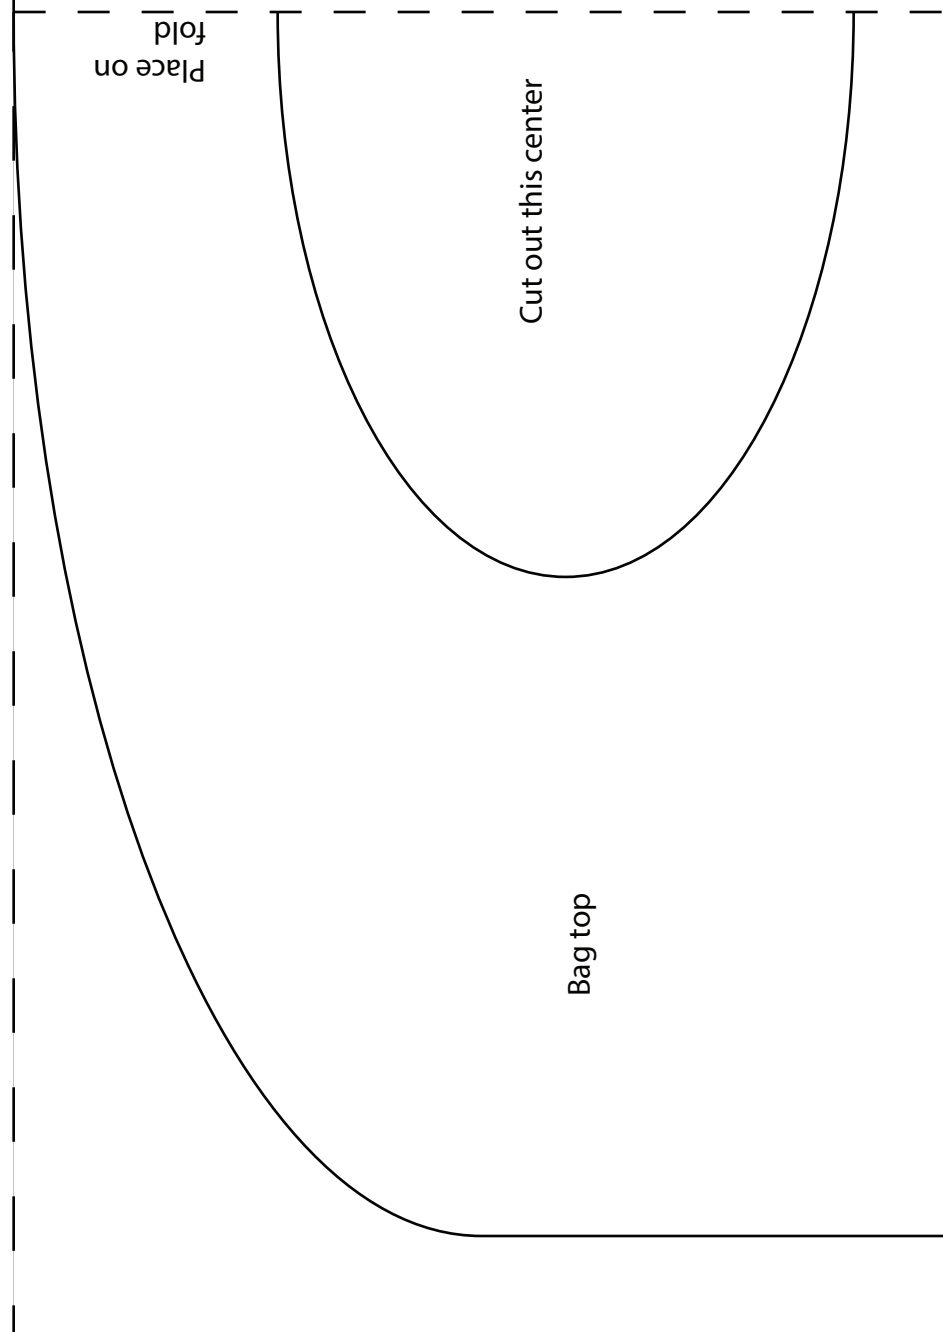

This square should measure 1" x 1" (2.54cm x 2.54cm) when printed.

\*\*\* Measure templates before cutting to confirm printing at 100%\*\*\*

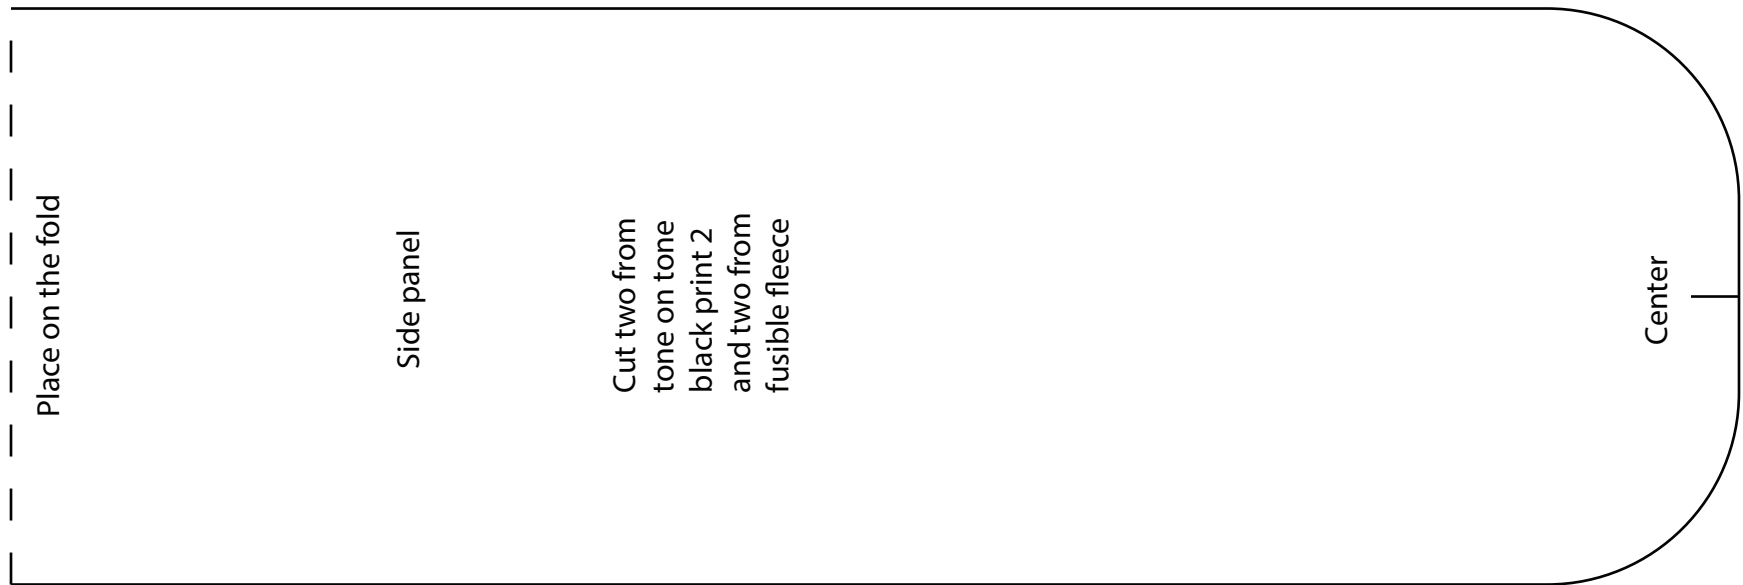

This square should measure 1" x 1" (2.54cm x 2.54cm) when printed.

\*\*\* Measure templates before cutting to confirm printing at 100%\*\*\*